

Research Journal of Pharmaceutical, Biological and Chemical Sciences

Variable Rate Spreading Scheme for MCCDMA System Over Longer Delay Channels.

Paparao CH*, Sumithabhashini P², and Chandrasekhar Reddy P.

¹Asst. Professor Tirumala Engineering College, Narasaraopet, India.

²HOD, ACE Engineering College, Hyderabad, [India](#).

³Professor, JNTUH Hyderabad, [India](#).

ABSTRACT

Multi Carrier Code Division Multiple Access (MC-CDMA) system considered to be a key enabler for both 4G and future 5G air interface to achieve ultimate goal of spectrum efficiency with good QoS. During resource sharing interference is greatly reduced with spreading gain which incorporates orthogonality. The multiple access interference cause by multipath channel environment is largely depends on correlation among spreading codes. The statistical analyzes have already proved that changes made in spreading gain will cause trade off effect over variable rate transmission. Here in this paper by considering spreading gain over user rate spreading diversity and phase characteristics of spreading code is changed in MCCDMA system. Finally we proved that the proposed transceiver type will give better metrics over longer delay channels. Both robustness over variable rate and its efficiency over successive and parallel interference cancellation has been analyzed and verified through simulations.

Keywords: MCCDMA, spreading code, correlation, Multiple access interference (MAI)

**Corresponding author*

and it offers significant simplicity at the receiver side. And then generation of the spreading code as per the weighted matrix according to the specifications has given in previous section. Both Flexibility and orthogonality are considered according to the Qos level required for that transmission and optimum diversity for given user rate. The ultimate goal is to mitigate the multiple access interference problem over time varying channels offers optimal coding gain which is within the range of the speed constrains.

Additionally to compact the multiple access interference (MAI) during multiple access schemes with variable puncture rate forward error correction (FEC) code since optimal error level for given user over data rate requirements is varying form one user to another. The transmitter characteristics are well defined with optimized spreading and channel codes used. And channel allocation or sub carrier mapping is carried out through IFFT transform. The conventional radix factorizations of FFT transform are not sufficient to balance the user rate requirements. The composite method of radix- 2^k can be used as a potential alternative to high radix (radix-8, 16) for getting accurate merits of this system in digital implementations.

At the receiver side, data retrieval is carried with simplified composite codes and error correction methods. The interference cancellation with orthogonal subcarriers is achieved through single tap or parallel taps to provide tradeoff between design complexities over Qos requirements.

Correlation property

As like all other Direct Sequence spread spectrum type here also the code sequence are binary sequences. The duration of chip time (t) is fixed for all types of user rate. Here there is no limitations on the length of the spreading codes but it is well constrained by number of groups categorized .Behaviour of all the modules in the demonstrator and includes a realistic MIMO channel model. It has been stated earlier that weightaed code sequence may be sensitive to phase noise and proper synchronization method have to incorporate for better performance with slight complexity overhead.

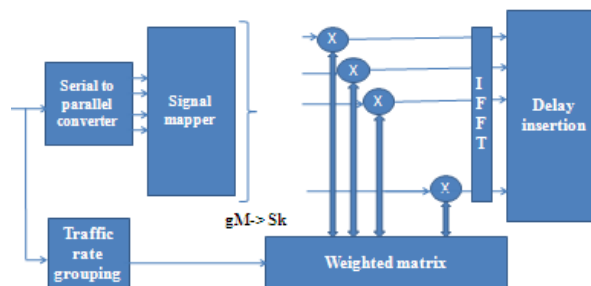


Figure 1. Transmitter architecture

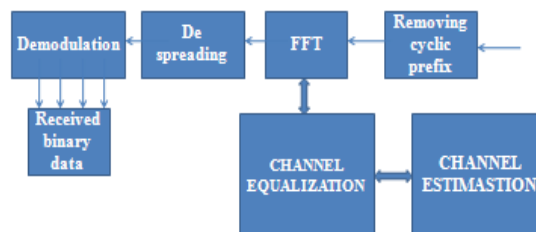


Figure 2. Receiver architecture

MC CDMA system model parameters

Here to incorporate only the delay spread impact at the receiver side it is assumed to be perfectly synchronized with transmitter minimum mean square error (MMSE) based equalization is used to get to know best possible performance metrics from MC-CDMA system.

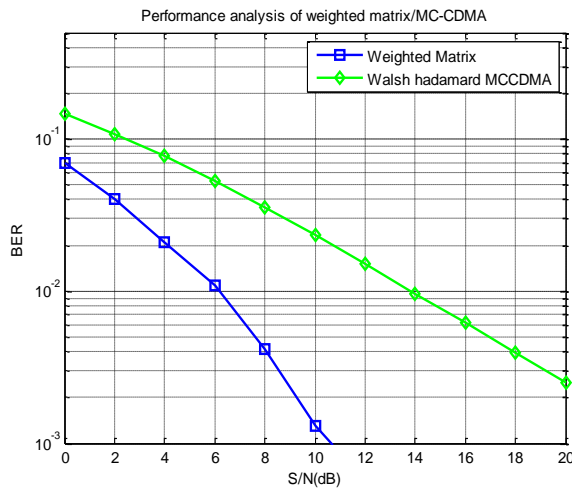


Figure 3. MAI interference over weighted matrix code

To analyze the system performance over multiple access interference (MAI) each user is allowed to experience certain degree of correlation from other user within a group. The proposed weighted driven spreading method outperforms hadamard transform under moderate MAI interference among users as shown in Figure 3.

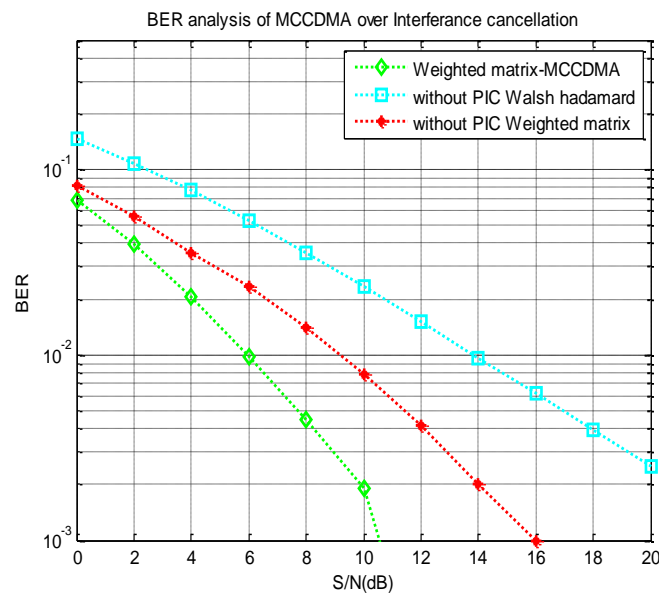


Figure 4. BER reduction with interference cancellation

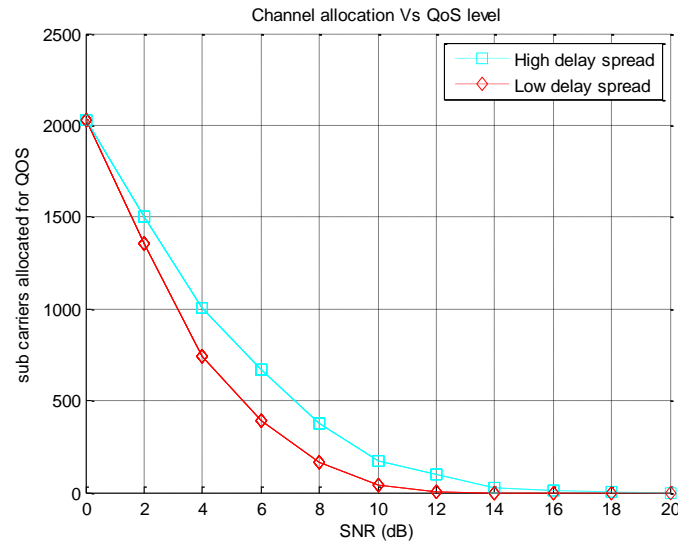


Figure 5. Qos driven carrier mapping analyzes

PERFORMANCE RESULTS

The simulation of adoptive rate transmission over longer delay channels with higher order modulation is carried out without using any error correction mechanism. The advantages of applying interference cancellation are quite virtual with weighted driven method as shown in Figure 4. For longer delay channel we were used ITU vehicular channel models with high delay spread. Generation of channel coefficients is restricted with smaller Doppler frequencies since purpose of the work is to prove the robustness over delay spread. First we analyze the metrics of weighted driven spreading codes and then its impact over PIC and SIC methods are evaluated. And finally efficiency of resource allocation over variable rate transmission is shown in Figure 5.

CONCLUSION

In this paper, a novel low-complexity spreading codes for MCCDMA is replaced with weighted driven spreading codes with zero correlation property. It is based on the use of input user rate and on the QoS related to the particular transmission. For compatibility purpose, typical MCCDMA system is analyzed with interference cancellation choices for next generation wireless standards. Analytical and simulation results of the system are demonstrating significant BER reduction.

REFERENCES

- [1] Gemeay, E., et al. "Performance of Multicarrier CDMA with Time-Frequency Spreading in Frequency Impairment Channels." 2008 4th International Conference on Wireless Communications, Networking and Mobile Computing. IEEE, 2008.
- [2] Abudoukeremu, Ainiwan, et al. "Multicarrier transmission systems with spreading sequences in large delay spread channel." The Sixth International Workshop on Signal Design and Its Applications in Communications. IEEE, 2013.
- [3] Chang, Ming-Xian. "Single-Carrier Block Transmission Asynchronous CDMA with Frequency-Domain Equalization." 2008 IEEE Wireless Communications and Networking Conference. IEEE, 2008.
- [4] Chen, Qingxin, Elvino S. Sousa, and Subbarayan Pasupathy. "Multicarrier CDMA with adaptive frequency hopping for mobile radio systems." IEEE journal on selected areas in communications 14.9 (1996): 1852-1858.
- [5] Elkashlan, Maged, and Cyril Leung. "Performance of frequency-hopping multicarrier CDMA on an uplink with correlated Rayleigh fading." Global Telecommunications Conference, 2003. GLOBECOM'03. IEEE. Vol. 6. IEEE, 2003.

- [6] Li, Xuan, Yu Chieh Huang, and Bouchra Senadji. "MAI Analysis of an Asynchronous MC-CDMA System With Polarization Diversity." International Conference on Signal Processing and Communication Systems, ICSPCS, Gold Coast, Australia. 2007.
- [7] Halim, Joseph Victor Maher, Hesham El-Badawy, and Hadia M. El-Hennawy. "Performance Analysis of Adaptive Polarized MIMO Pre-RAKE Combined Transmit Diversity System in FDD." *Wireless Personal Communications* 67.2 (2012): 453-483.
- [8] Yui, Tatsunori, Hiromichi Tomeba, and Fumiyuki Adachi. "Impact of Spreading Factor on Turbo-coded Multi-code MC-CDMA using ICI cancellation." 2008 14th Asia-Pacific Conference on Communications. IEEE, 2008.
- [9] Ling, Andrew S., and Laurence B. Milstein. "The effects of spatial diversity and imperfect channel estimation on multi-carrier CDMA systems." MILCOM 2008-2008 IEEE Military Communications Conference. IEEE, 2008.